
GHS

Printing date 03.04.2014

Revision: 03.04.2014

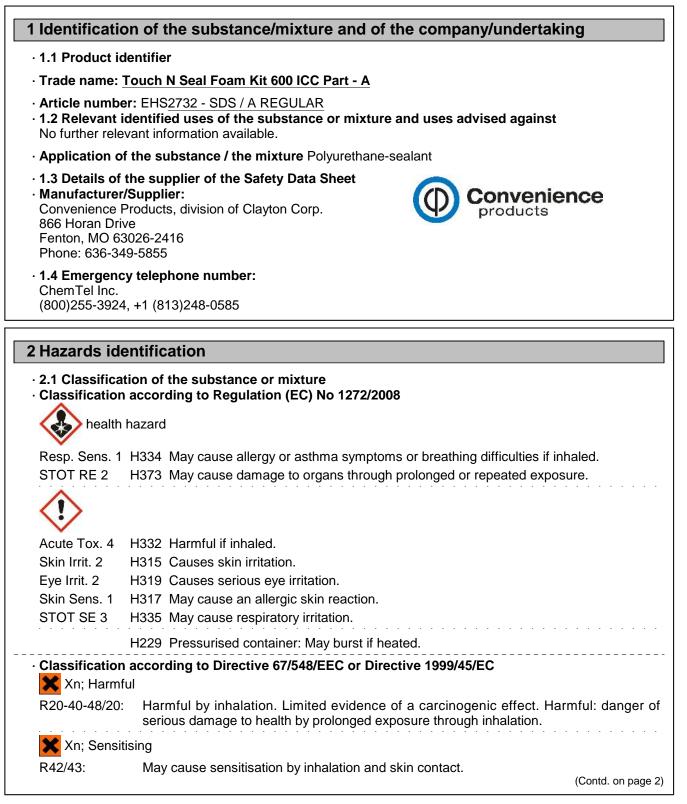

Printing date 03.04.2014


Revision: 03.04.2014

Trade name: Touch N Seal Foam Kit 600 ICC Part - A

| | (Contd. of page 1) |
|-------------------------------------|---|
| 🗙 Xi; Irritant | |
| R36/37/38: | Irritating to eyes, respiratory system and skin. |
| | ncerning particular hazards for human and environment: |
| | to be labelled due to the calculation procedure of the "General Classification guideline for |
| | the EU" in the latest valid version. |
| Warning! Pressu | |
| · Classification s | |
| | on is according to the latest editions of the EU-lists, and extended by company and |
| literature data. | on is according to the latest cultions of the Lo lists, and extended by company and |
| | on is in accordance with the latest editions of international substances lists, and is |
| | y information from technical literature and by information provided by the company. |
| | · |
| · 2.2 Label eleme | |
| | rding to Regulation (EC) No 1272/2008 |
| | lassified and labelled according to the CLP regulation. |
| Hazard pictogra | ams |
| | |
| | |
| | |
| GHS07 GHS08 | |
| 0 | |
| · Signal word Da | inger |
| · Hazard-determi | ining components of labelling: |
| diphenylmethane | ediisocyanate, isomeres and homologues |
| 4,4'-methylenedi | iphenyl diisocyanate |
| · Hazard stateme | ents |
| H229 Pressurise | ed container: May burst if heated. |
| H332 Harmful if | inhaled. |
| H315 Causes sk | kin irritation. |
| | erious eye irritation. |
| | e allergy or asthma symptoms or breathing difficulties if inhaled. |
| | e an allergic skin reaction. |
| | e respiratory irritation. |
| | e damage to organs through prolonged or repeated exposure. |
| Precautionary s | |
| P101 | If medical advice is needed, have product container or label at hand. |
| P102 | Keep out of reach of children. |
| P103 | Read label before use. |
| P260 | Do not breathe dust/fume/gas/mist/vapours/spray. |
| P285 | In case of inadequate ventilation wear respiratory protection. |
| P264 | Wash thoroughly after handling. |
| P305+P351+P33 | 38 IF IN EYES: Rinse cautiously with water for several minutes. Remove contact lenses, if |
| D242, D244 | present and easy to do. Continue rinsing. |
| P342+P311 P302+P352 | If experiencing respiratory symptoms: Call a POISON CENTER or doctor/physician. |
| P302+P352 P501 | IF ON SKIN: Wash with plenty of soap and water. Dispose of contents/container in accordance with local/regional/national/international |
| 1 301 | regulations. |
| | (Contd. on page 3) |
| | |

Printing date 03.04.2014

Revision: 03.04.2014

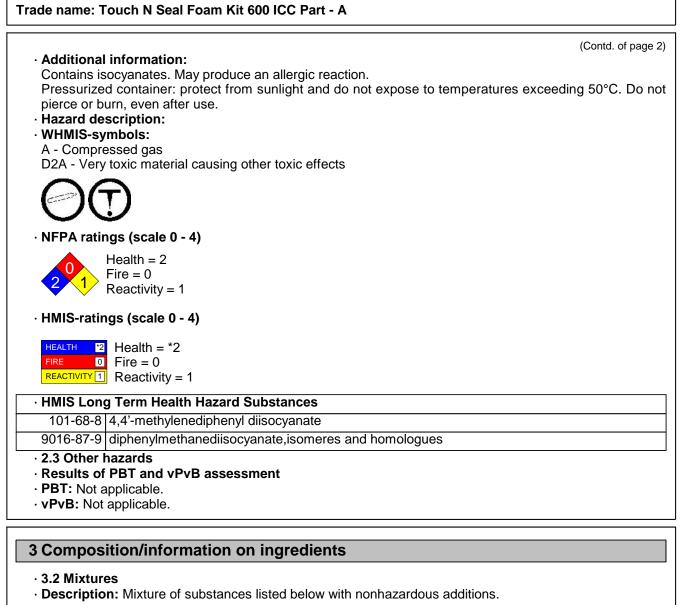

· Dangerous components:

(Contd. on page 4)

Printing date 03.04.2014

Revision: 03.04.2014

Trade name: Touch N Seal Foam Kit 600 ICC Part - A

| | (Conto | d. of page 3) |
|--|--|---------------|
| CAS: 9016-87-9 | diphenylmethanediisocyanate,isomeres and homologues Xn R20; Xn R42/43; Xi R36/37/38 Carc. Cat. 3 | > 50% |
| | Resp. Sens. 1, H334; STOT RE 2, H373 Acute Tox. 4, H332; Skin Irrit. 2, H315; Eye Irrit. 2, H319; Skin Sens. 1, H317; STOT SE 3, H335 | |
| CAS: 101-68-8 EINECS: 202-966-0 Index number: 615-005-00-9 | 4,4'-methylenediphenyl diisocyanate Xn R20; Xn R42/43; Xi R36/37/38 Carc. Cat. 3 | 25-50% |
| | Resp. Sens. 1, H334; STOT RE 2, H373 Acute Tox. 4, H332; Skin Irrit. 2, H315; Eye Irrit. 2, H319; Skin Sens. 1, H317; STOT SE 3, H335 | |
| CAS: 811-97-2 EINECS: 212-377-0 | | 10-25% |
| | Press. Gas, H280 the wording of the listed risk phrases refer to section 16. | |

4 First aid measures

4.1 Description of first aid measures · General information: Take affected persons out into the fresh air. Do not leave affected persons unattended. Symptoms of poisoning may even occur after several hours; therefore medical observation for at least 48 hours after the accident. · After inhalation: Supply fresh air and to be sure call for a doctor. In case of unconsciousness place patient stably in side position for transportation. · After skin contact: Immediately wash with water and soap and rinse thoroughly. Do not pull solidified product off the skin. If skin irritation continues, consult a doctor. · After eye contact: Protect unharmed eye. Rinse opened eye for several minutes under running water. Call a doctor immediately. Do not remove contact lenses if worn. · After swallowing: Unlikely route of exposure. Do not induce vomiting; call for medical help immediately. · 4.2 Most important symptoms and effects, both acute and delayed Asthma attacks Headache Allergic reactions Coughing Breathing difficulty Dizziness (Contd. on page 5)

Printing date 03.04.2014

· Hazards

Revision: 03.04.2014

Trade name: Touch N Seal Foam Kit 600 ICC Part - A

(Contd. of page 4)

Danger of impaired breathing. Danger of pulmonary oedema. Danger of convulsion. Danger of disturbed cardiac rhythm. Condition may deteriorate with alcohol consumption. 4.3 Indication of any immediate medical attention and special treatment needed Severe allergic skin reaction, bronchial spasms and anaphylactic shock are possible. If necessary oxygen respiration treatment. Later observation for pneumonia and pulmonary oedema. Monitor circulation, possible shock treatment. Treat skin and mucous membrane with antihistamine and corticoid preparations. 5 Firefighting measures · 5.1 Extinguishing media Suitable extinguishing agents: CO2, powder or water spray. Fight larger fires with water spray or alcohol resistant foam. · For safety reasons unsuitable extinguishing agents: None. · 5.2 Special hazards arising from the substance or mixture Danger of receptacles bursting because of high vapour pressure when heated. In case of fire, the following can be released: Nitrogen oxides (NOx) Hydrogen cyanide (HCN) Carbon monoxide (CO) Under certain fire conditions, traces of other toxic gases cannot be excluded. · 5.3 Advice for firefighters · Protective equipment: Wear self-contained respiratory protective device. Wear fully protective suit. · Additional information Cool endangered receptacles with water spray.

6 Accidental release measures

6.1 Personal precautions, protective equipment and emergency procedures
Use respiratory protective device against the effects of fumes/dust/aerosol.
Remove persons from danger area.
Ensure adequate ventilation
Wear protective equipment. Keep unprotected persons away.
Protect from heat.
6.2 Environmental precautions: Do not allow to enter sewers/ surface or ground water.
6.3 Methods and material for containment and cleaning up:
Allow to solidify. Pick up mechanically.
Clean the affected area carefully; suitable cleaners are:
Warm water and cleansing agent
Dispose contaminated material as waste according to item 13.

(Contd. on page 6)

GHS

Printing date 03.04.2014

Revision: 03.04.2014

Trade name: Touch N Seal Foam Kit 600 ICC Part - A

· 6.4 Reference to other sections

See Section 7 for information on safe handling.

See Section 8 for information on personal protection equipment.

See Section 13 for disposal information.

7 Handling and storage

· 7.1 Precautions for safe handling Use only in well ventilated areas. Take note of emission threshold. Ensure good ventilation/exhaustion at the workplace. · Information about fire - and explosion protection: Pressurized container: protect from sunlight and do not expose to temperatures exceeding 50 °C, i.e. electric lights. Do not pierce or burn, even after use. Do not spray onto a naked flame or any incandescent material. · 7.2 Conditions for safe storage, including any incompatibilities · Storage: · Requirements to be met by storerooms and receptacles: Observe official regulations on storing packagings with pressurized containers. Store in a cool location. Provide ventilation for receptacles. · Information about storage in one common storage facility: Store away from foodstuffs. Do not store together with acids. Store away from oxidizing agents. · Further information about storage conditions: Store in cool, dry conditions in well sealed receptacles. Store in a cool place. Heat will increase pressure and may lead to the receptacle bursting. Protect from heat and direct sunlight. Store receptacle in a well ventilated area. • 7.3 Specific end use(s) No further relevant information available. 8 Exposure controls/personal protection

· Additional information about design of technical facilities: No further data; see item 7.

· 8.1 Control parameters

| · Ingredients | with limit values that require monitoring at the workplace: |
|--|--|
| 101-68-8 4,4'-methylenediphenyl diisocyanate | |
| PEL (USA) | Short-term value: C 0,2 mg/m ³ , C 0,02 ppm |
| REL (USA) | Short-term value: C 0,2* mg/m³, C 0,02* ppm Long-term value: 0,05 mg/m³, 0,005 ppm *10-min |
| | (Contd. on page 7) |

(Contd. of page 5)

Printing date 03.04.2014

Revision: 03.04.2014

Trade name: Touch N Seal Foam Kit 600 ICC Part - A

(Contd. of page 6) TLV (USA) 0,051 mg/m³, 0,005 ppm EL (Canada) Short-term value: C 0,01 ppm Long-term value: 0,005 ppm Skin: S EV (Canada) 0,005 ppm 811-97-2 Norflurane WEEL (USA) 1000 ppm DNELs No further relevant information available. PNECs No further relevant information available. · Additional information: The lists valid during the making were used as basis. · 8.2 Exposure controls · Personal protective equipment: · General protective and hygienic measures: Keep away from foodstuffs, beverages and feed. Immediately remove all soiled and contaminated clothing. Wash hands before breaks and at the end of work. Avoid contact with the eyes and skin. · Respiratory protection: Use suitable respiratory protective device in case of insufficient ventilation. Use suitable respiratory protective device when high concentrations are present. Protection of hands: Protective gloves The glove material has to be impermeable and resistant to the product/ the substance/ the preparation. Due to missing tests no recommendation to the glove material can be given for the product/ the preparation/ the chemical mixture. Selection of the glove material on consideration of the penetration times, rates of diffusion and the degradation. · Material of gloves Nitrile rubber, NBR **PVC** gloves Fluorocarbon rubber (Viton) The selection of the suitable gloves does not only depend on the material, but also on further marks of guality and varies from manufacturer to manufacturer. As the product is a preparation of several substances, the resistance of the glove material can not be calculated in advance and has therefore to be checked prior to the application. · Penetration time of glove material The exact break through time has to be found out by the manufacturer of the protective gloves and has to be observed. · Not suitable are gloves made of the following materials: Natural rubber, NR · Eve protection: Contact lenses should not be worn. (Contd. on page 8)

Printing date 03.04.2014

Revision: 03.04.2014

Trade name: Touch N Seal Foam Kit 600 ICC Part - A

(Contd. of page 7)



Safety glasses

Goggles recommended during refilling

- Body protection: Impervious protective clothing
- Limitation and supervision of exposure into the environment No further relevant information available.
 Risk management measures
- See Section 7 for additional information. No further relevant information available.

9 Physical and chemical properties

| 9.1 Information on basic physical a General Information | ind chemical properties |
|---|--|
| Appearance: Form: Colour: Odour: Odour: Odour threshold: | Aerosolized liquid with compressed gas in cylinders Cream coloured Characteristic Not determined. |
| · pH-value: | Not determined. |
| Change in condition Melting point/Melting range: Boiling point/Boiling range: | Not Determined. Not applicable, as aerosol. |
| · Flash point: | Not applicable, as aerosol. |
| · Flammability (solid, gaseous): | Not applicable. |
| · Auto/Self-ignition temperature: | Not determined. |
| · Decomposition temperature: | Not determined. |
| · Self-igniting: | Product is not self-igniting. |
| · Danger of explosion: | Product does not present an explosion hazard. |
| Explosion limits: Lower: Upper: | Not determined. Not determined. |
| · Vapour pressure at 20 °C: | 5716 hPa |
| Density at 20 °C: Relative density Vapour density Evaporation rate | 1,03 g/cm ³ Not determined. Not determined. Not applicable. |
| | (Contd. on page 9) |

Printing date 03.04.2014

Revision: 03.04.2014

| Solubility in / Miscibility with | | (Contd. of page a |
|---|---|-------------------|
| | | |
| water: | Not miscible or difficult to mix. | |
| Partition coefficient (n-octanol/v | vater): Not determined. | |
| · Viscosity: | | |
| Dynamic: | Not determined. | |
| Kinematic: | Not determined. | |
| Solvent content: | | |
| VOC (US EPA Method 24) | 0 g/l | |
| 9.2 Other information | No further relevant information available. | |
| | ed according to specifications. actions eous acids and alkalis. | |
| Reacts with oxidizing agents. Exothermic polymerization. • 10.4 Conditions to avoid Store a • 10.5 Incompatible materials: Cor • 10.6 Hazardous decomposition | ntact with acids liberates toxic gas. | |
| · IU.6 Hazaroous necomnosition | | |
| Carbon monoxide and carbon diox Ammonia | lde | |
| Carbon monoxide and carbon diox | lae | |

- \cdot on the skin: Irritant to skin and mucous membranes.
- on the eye: Irritating effect.
- · Sensitization:
- Sensitization possible through inhalation.
- Sensitization possible through skin contact.

(Contd. on page 10)

Printing date 03.04.2014

Trade name: Touch N Seal Foam Kit 600 ICC Part - A

· Additional toxicological information:

The product shows the following dangers according to the calculation method of the General EU Classification Guidelines for Preparations as issued in the latest version: Harmful

Irritant

Toxic and/or corrosive effects may be delayed up to 24 hours.

· Sensitisation: Sensitization possible by inhalation and/or dermal contact.

• Repeated dose toxicity: Repeated exposures may result in skin and/or respiratory sensitivity.

12 Ecological information

12.1 Toxicity

· Aquatic toxicity: The product contains materials that are harmful to the environment.

- 12.2 Persistence and degradability The product is partially biodegradable. Significant residuals remain.
- · 12.3 Bioaccumulative potential Does not accumulate in organisms.
- · 12.4 Mobility in soil No further relevant information available.
- · Additional ecological information:
- · General notes:

This statement was deduced from products with a similar structure or composition.

Due to available data on eliminability/decomposition and bioaccumulation potential prolonged term damage of the environment can not be excluded.

Water hazard class 1 (German Regulation) (Self-assessment): slightly hazardous for water

Do not allow undiluted product or large quantities of it to reach ground water, water course or sewage system.

- · 12.5 Results of PBT and vPvB assessment
- · PBT: Not applicable.
- · vPvB: Not applicable.
- 12.6 Other adverse effects No further relevant information available.

13 Disposal considerations

13.1 Waste treatment methods

· Recommendation

Can be disposed of with household garbage after solidification following consultation with the waste disposal facility operator and the pertinent authorities and adhering to the necessary technical regulations. Can be burned with household garbage after consulting with the waste disposal facility operator and the pertinent authorities and adhering to the necessary technical regulations. Contact waste processors for recycling information.

Uncleaned packaging:

· Recommendation:

Packagings that may not be cleansed are to be disposed of in the same manner as the product. Disposal must be made according to official regulations.

(Contd. of page 9)

Revision: 03.04.2014

(Contd. on page 11)

Printing date 03.04.2014

Г

Trade name: Touch N Seal Foam Kit 600 ICC Part - A

(Contd. of page 10)

Revision: 03.04.2014

| Transport information | |
|---|--|
| 14.1 UN-Number DOT, ADR, IMDG, IATA 14.2 UN proper shipping name DOT, IMDG, IATA ADR 14.3 Transport hazard class(es) | UN3500 Chemical under pressure, n.o.s. (Fluorinat Hydrocarbon, Nitrogen) 3500 CHEMICAL UNDER PRESSURE, N.O (Fluorinated Hydrocarbon, Nitrogen) |
| DOT | |
| · Class · Label | 2.2 2.2 |
| ADR | |
| Class Label | 2 8A Gases. 2.2 |
| | |
| · Class · Label | 2.2 2.2 |
| · 14.4 Packing group · DOT, ADR, IMDG, IATA · 14.5 Environmental hazards: | Not Regulated |
| Marine pollutant: 14.6 Special precautions for user Danger code (Kemler): EMS Number: | No Warning: Gases. 20 F-D,S-U |
| • 14.7 Transport in bulk according to Annex I MARPOL73/78 and the IBC Code | |
| Transport/Additional information: | |
| · ADR · Limited quantities (LQ) · Transport category | 120 ml 3 |
| Transport category | 3 (Contd. on page |

Printing date 03.04.2014

Revision: 03.04.2014

Trade name: Touch N Seal Foam Kit 600 ICC Part - A

| | (Contd. of page 11) |
|---|--|
| Tunnel restriction code | C/E |
| UN "Model Regulation": | UN3500, CHEMICAL UNDER PRESSURE, N.O.S. |
| | (Fluorinated Hydrocarbon, Nitrogen), 2.2 |

15 Regulatory information

| • 15.1 Safety, health and environmental regulations/ • United States (USA) • SARA | /legislation specific for the substance or mixtur |
|---|---|
| · Section 355 (extremely hazardous substances): | |
| None of the ingredients is listed. | |
| · Section 313 (Specific toxic chemical listings): | |
| 9016-87-9 diphenylmethanediisocyanate, isomeres ar | nd homologues |
| 101-68-8 4,4'-methylenediphenyl diisocyanate | |
| · TSCA (Toxic Substances Control Act): | |
| All ingredients are listed. | |
| · Proposition 65 (California): | |
| · Chemicals known to cause cancer: | |
| None of the ingredients is listed. | |
| · Chemicals known to cause reproductive toxicity for | or females: |
| None of the ingredients is listed. | |
| · Chemicals known to cause reproductive toxicity for | or males: |
| None of the ingredients is listed. | |
| · Chemicals known to cause developmental toxicity | /: |
| None of the ingredients is listed. | |
| · Carcinogenic Categories | |
| • EPA (Environmental Protection Agency) | |
| 9016-87-9 diphenylmethanediisocyanate,isomeres ar | • |
| 101-68-8 4,4'-methylenediphenyl diisocyanate | CBI |
| · IARC (International Agency for Research on Cance | • |
| 9016-87-9 diphenylmethanediisocyanate,isomeres ar | C C |
| 101-68-8 4,4'-methylenediphenyl diisocyanate | |
| \cdot TLV (Threshold Limit Value established by ACGIH |) |
| None of the ingredients is listed. | |
| · NIOSH-Ca (National Institute for Occupational Safe | ety and Health) |
| None of the ingredients is listed. | |
| · Canada | |
| · Canadian Domestic Substances List (DSL) | |
| All ingredients are listed. | |
| | (Contd. on page |

Printing date 03.04.2014

Revision: 03.04.2014

Trade name: Touch N Seal Foam Kit 600 ICC Part - A

(Contd. of page 12)

· Canadian Ingredient Disclosure list (limit 0.1%)

101-68-8 4,4'-methylenediphenyl diisocyanate

· Canadian Ingredient Disclosure list (limit 1%)

None of the ingredients is listed.

· Other regulations, limitations and prohibitive regulations

· Substances of very high concern (SVHC) according to REACH, Article 57

None of the ingredients is listed.

· 15.2 Chemical safety assessment: A Chemical Safety Assessment has not been carried out.

16 Other information

This information is based on our present knowledge. However, this shall not constitute a guarantee for any specific product features and shall not establish a legally valid contractual relationship.

· Relevant phrases

- H280 Contains gas under pressure; may explode if heated.
- H315 Causes skin irritation.
- H317 May cause an allergic skin reaction.
- H319 Causes serious eye irritation.
- H332 Harmful if inhaled.
- H334 May cause allergy or asthma symptoms or breathing difficulties if inhaled.
- H335 May cause respiratory irritation.
- H373 May cause damage to organs through prolonged or repeated exposure.
- R20 Harmful by inhalation.
- R36/37/38 Irritating to eyes, respiratory system and skin.
- R42/43 May cause sensitisation by inhalation and skin contact.

· Abbreviations and acronyms:

ADR: Accord européen sur le transport des marchandises dangereuses par Route (European Agreement concerning the International Carriage of Dangerous Goods by Road) IMDG: International Maritime Code for Dangerous Goods DOT: US Department of Transportation IATA: International Air Transport Association GHS: Globally Harmonized System of Classification and Labelling of Chemicals ACGIH: American Conference of Governmental Industrial Hygienists EINECS: European Inventory of Existing Commercial Chemical Substances ELINCS: European List of Notified Chemical Substances CAS: Chemical Abstracts Service (division of the American Chemical Society) NFPA: National Fire Protection Association (USA) HMIS: Hazardous Materials Identification System (USA) WHMIS: Workplace Hazardous Materials Information System (Canada) DNEL: Derived No-Effect Level (REACH) PNEC: Predicted No-Effect Concentration (REACH) LC50: Lethal concentration, 50 percent

- LD50: Lethal dose, 50 percent
- : Flammable aerosols, Hazard Category 3
- Press. Gas: Gases under pressure: Compressed gas
- Acute Tox. 4: Acute toxicity, Hazard Category 4
- Skin Irrit. 2: Skin corrosion/irritation, Hazard Category 2
- Eye Irrit. 2: Serious eye damage/eye irritation, Hazard Category 2
- Resp. Sens. 1: Sensitisation Respirat., Hazard Category 1

(Contd. on page 14)

Printing date 03.04.2014

Revision: 03.04.2014

Trade name: Touch N Seal Foam Kit 600 ICC Part - A

(Contd. of page 13)

Skin Sens. 1: Sensitisation - Skin, Hazard Category 1 STOT SE 3: Specific target organ toxicity - Single exposure, Hazard Category 3 STOT RE 2: Specific target organ toxicity - Repeated exposure, Hazard Category 2 • **Sources** SDS Prepared by: ChemTel Inc. 1305 North Florida Avenue Tampa, Florida USA 33602-2902

Toll Free North America 1-888-255-3924 Intl. +01 813-248-0573 Website: www.chemtelinc.com