

# ENLIGHTENED PRODUCT FOR INDUSTRY



## SO MUCH MORE...

In addition to spray foam solutions, Suburban Manufacturing offers a complete line of standard products sold under Tsunami Compressed Air Solutions™, Lubrication Systems, and Protective Coverings brands.

- Tsunami Compressed Air Solutions™ offers premium air filtration and drying equipment designed to assist customers in obtaining clean, dry air for their specific application needs.
- Lubrication Systems provides a complete line of automatic oiling systems and custom grease systems for optimized service and maintenance.
- Protective Coverings offers protective sleeve and straps manufactured from a wide variety of custom fabrics to provide equipment and operator protection.



Call Suburban at  
1-800-752-5752  
or visit us online at  
[www.gosuburban.com](http://www.gosuburban.com)

**Made in the USA**



Suburban Manufacturing is  
committed to the principles  
and structure of the  
ISO 9001:2008 registration.

**ISO Certified**



Our website now works on  
a responsive template and  
is easily accessible on any  
hand-held device.

**Optimized Website**

# SPF INNOVATIONS

INDUSTRY LEADING AIR FILTRATION & HOSE PROTECTION



Distributed by:



**Suburban Manufacturing Inc.**  
10531 Dalton Ave NE  
Monticello, MN 55362  
Phone: 800.782.5752  
763.295.5635  
Fax: 763.295.6601  
Web: [www.gosuburban.com](http://www.gosuburban.com)




[www.gosuburban.com](http://www.gosuburban.com)  
[www.sprayfoamsleeve.com](http://www.sprayfoamsleeve.com)

# SPF HOSE PROTECTION

Spray foam hoses take a beating when pulled around job sites. It's not long before roll after roll of duct tape is used in an attempt to patch and repair existing hose socks. We have seen it all, carpet underlay, insulated tarps, even denim pants used to protect and insulate spray hose. Now, your operators hate how bulky, unwieldy and cumbersome the hose is to operate. Production slows, profits decline, and colder temperatures present the

challenge of maintaining proper SPF temperature. The **New Industry Standard** Has Arrived! As a solutions provider, we have revolutionized how Spray Foam contractors operate by developing SPF Hose Wrap and Coupler Guards designed to maximize yield and performance by providing unmatched abrasion protection and thermal retention.



## THERMAL RETENTION

The radiant liner in Sidewinder has been proven to increase thermal retention by up to 25°F.



## EASY ACCESS

Military grade Hook & Loop closure reduces installation and/or service time by up to 70%.




## OPTIMIZED FOR SPF

Sidewinder is designed to resist water and petroleum, UV rays, and crisp edge applications.

“Sidewinder is the only hose guard that you can install 300’ in 60 minutes, 5x faster than traditional nylon web sock. I’ve fought with nylon sock and won’t ever do it again.”  
Keith Bowie  
Ecologic Spray Foam  
Chairperson for CUFCA

Part Number	Description	specifications	
		length	circumference
SW-2173	Non Insulated Hose Wrap	50'	7.4"
SW-2175	Insulated Hose Wrap	50'	8.6"
SW-2174	Non Insulated Coupler Guard	3'	10.9" tapered
SW-2176	Insulated Coupler Guard	3'	12.5" tapered

Sidewinder SPF products come standard with sewn in internal straps insuring a tight fit with your hose and couplers.

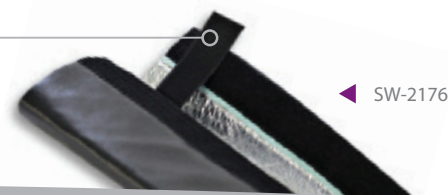


# SPF CLEAN AIR EQUIPMENT

Today, many factory installed filtration and drying systems lack the ability to adequately dry your system's compressed air and also consume valuable floor space in spray foam rigs. The slightest bit of moisture in your system will prevent proper chemical reaction and cause contamination to damage your guns.

**Maximizing your rig's performance** is our main focus. Tsunami branded air filters and drying systems are manufactured in the United States. Our systems use the latest Regenerative technology designed to supply your operation with consistent clean, dry air regardless of the season!

## TSUNAMI BENEFITS

- RH down to .01% / dew points down to -80°F
- Remove water & oil down to 10 micron
- Remove oil mist & aerosol down to .01 micron
- Easy, low cost maintenance
- 3 year warranty on Complete Drying Systems

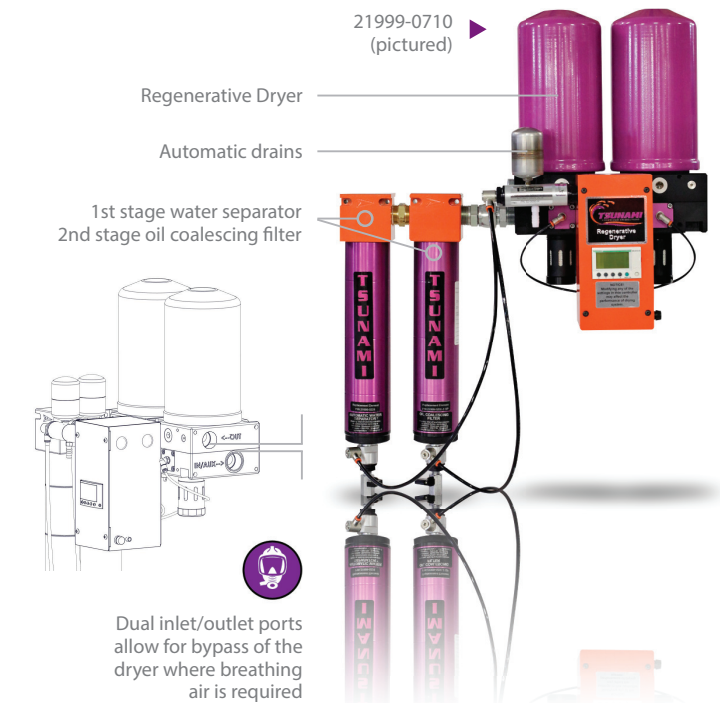

Dual inlet/outlet ports allow for bypass of the dryer where breathing air is required

Part Number	Description	specifications			
		max flow	max pressure	max temp	port size
21999-0710	10Hp Regenerative Air Drying System	40 scfm	175 psi	150°F	1" npt
21999-0357	Membrane Drying System	25 scfm	175 psi	100°F	1/2" npt
21999-0253	2 Stage Filter Package with Regulator	50 scfm	250 psi	122°F	1/2" npt
21999-0251	2 Stage Filter Package	50 scfm	250 psi	175°F	1/2" npt
21999-0131	Water Separator	50 scfm	250 psi	175°F	1/2" npt
21999-0131-Z-FD	Oil Coalescing Filter	50 scfm	250 psi	175°F	1/2" npt



Tsunami filters are anodized inside and out for maximum corrosion resistance. This prevents rust and corrosion, caused by polyurethane, from collecting inside the filter housings.