



**ANY JOB.
ANY SIZE.
ANY PLACE.**

55 Years of American Ingenuity

5200

Maximize your production with a **5200** machine. Designed for low maintenance and high production, the **5200** provides a large easy loading hopper while offering simple rugged performance. The **5200** is intended to function as a truck mount machine for the professional contractor or for use in manufactured housing.

- Engineered for cellulose & fiberglass blowing insulation
- Removable all steel airlock allows quick access for maintenance
- Durable powder coat finish
- 23 1/2 Hp Kubota Diesel Engine
- Positive Displacement Blower
- Convertible fold down loading door
- Large hopper capacity for less reloading time

Available in PTO, Diesel & Electric

Backed by a manufacturer's
2-YEAR WARRANTY - Made in the U.S.A.

5200

MATERIAL PRODUCTION RATE

MATERIAL	lbs/hr (kg/hr)
FIBERGLASS	2300 (1043)
CELLULOSE	5200 (2358)

lbs/hr (kg/hr) rating with 150 ft. (45.8 m.) of 4" (10.2 cm.)

Hose at 16 ft. (4.8 m.) elevation, product brand, product density and variable blowing conditions will affect production rate.

• HOPPER CAPACITY •

62 cu. ft. (1.75 m³)

Loading made easy with built in convertible tray

• WEIGHT/DIMENSIONS •

(Diesel & PTO)

2120 lbs / 43"W x 80"D x 83"H
962 kg. / 109cm x 203cm x 211cm

(Electric)

1700 lbs / 43"W x 70"D x 83"H
771 kg. / 109cm x 178cm x 211cm

• BLOWER/SIZE •

Positive Displacement Blower
Blower System yields

250 CFM @ 6 PSI (Diesel & PTO)

220 CFM @ 5 PSI (Electric)

• AIRLOCK •

18" x 14" diameter

(45.7cm. x 35.5cm. diameter)

4" (10cm.) Outlet

Triple Agitators


Designed for Constant Flow



Backed by a manufacturer's
2-YEAR WARRANTY - Made in the U.S.A.



23 1/2 Hp Kubota Diesel Engine

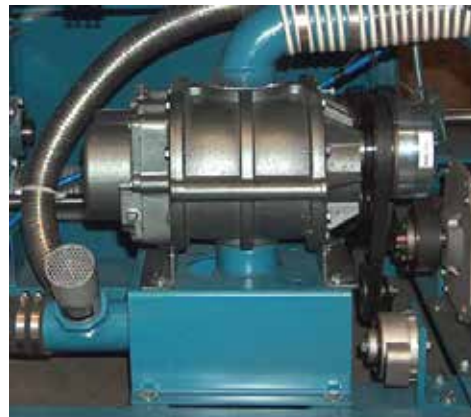

Positive Displacement Blower

w/250 CFM @ 6 psi (Diesel & PTO)

w/220 CFM @ 5 psi (Electric)



KRENDL

The Innovator in Insulation Equipment™